

11/27/00

JC813 U.S. PTO

JC836 U.S. PTO



11/27/00

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))</small>		Attorney Docket No. P-3750-US																																					
		First Inventor or Application Identifier	KANTSCHUK, Amir																																				
		Title	DYNAMIC ALLOCATION OF NEXT CANCELLATION FILTERS IN A MODEM POOL ENVIRONMENT																																				
		Express Mail Label No.																																					
APPLICATION ELEMENTS <small>See MPEP chapter 800 concerning patent application contents</small>		ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231																																					
<div>1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)</div> <div>2. <input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.</div> <div>3. <input checked="" type="checkbox"/> Specification [Total Pages 25] (preferred arrangement set forth below)<ul style="list-style-type: none">- Descriptive title of the Invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to sequence listing, a table, or a computer program listing appendix- Background of the Invention- Brief Summary of the Invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure</div> <div>4. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 9]</div> <div>5. <input checked="" type="checkbox"/> Oath or Declaration [Total Pages 4]<ul style="list-style-type: none">a. <input checked="" type="checkbox"/> Newly executed (original or copy)b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed)<ul style="list-style-type: none">i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).</div> <div>6. <input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76</div> <div>7. <input type="checkbox"/> CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)</div> <div>8. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)<ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Form (CRF)b. <input type="checkbox"/> Specification Sequence Listing on:<ul style="list-style-type: none">i. <input type="checkbox"/> CD-ROM or CD-R (2 copies); orii. <input type="checkbox"/> paperc. <input type="checkbox"/> Statements verifying identity of above copies</div>		ACCOMPANYING APPLICATION PARTS <div>9. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))</div> <div>10. <input type="checkbox"/> 37 C.F.R. §3.73(b) Statement (when there is an assignee) <input type="checkbox"/> Power of Attorney</div> <div>11. <input type="checkbox"/> English Translation Document (if applicable)</div> <div>12. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations</div> <div>13. <input type="checkbox"/> Preliminary Amendment</div> <div>14. <input type="checkbox"/> Return Receipt Postcard (MPEP 5303) (Should be specifically itemized)</div> <div>15. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)</div> <div>16. <input checked="" type="checkbox"/> Other: <u>Postcard</u></div>																																					
<div>17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input checked="" type="checkbox"/> Continuation-in-part (CIP) of prior application No.: <u>09 / 510,550</u> Prior application Information: Examiner: _____ Group/Art Unit: _____ For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.</div> <div>18. CORRESPONDENCE ADDRESS <input type="checkbox"/> Customer Number or Bar Code <u>[REDACTED]</u> or <input checked="" type="checkbox"/> Correspondence address below</div> <table border="1" style="width: 100%; border-collapse: collapse;"><tr><td colspan="2">Name</td><td colspan="2">Eitan, Pearl, Latzer & Cohen-Zadek</td></tr><tr><td colspan="2">Address</td><td colspan="2">One Crystal Park, Suite 210, 2011 Crystal Drive</td></tr><tr><td colspan="2">City</td><td colspan="2">Arlington</td></tr><tr><td colspan="2">Country</td><td>State</td><td>VA</td></tr><tr><td colspan="2"></td><td>Telephone</td><td>(703) 486-0600</td></tr><tr><td colspan="2"></td><td>Zip Code</td><td>22202-3709</td></tr><tr><td colspan="2"></td><td>Fax</td><td>(703) 486-0800</td></tr></table> <div><table border="1" style="width: 100%; border-collapse: collapse;"><tr><td>Name (Print/Type)</td><td>Mark S. Cohen</td><td>Registration No. (Attorney/Agent)</td><td>42,425</td></tr><tr><td>Signature</td><td></td><td>Date</td><td>27 November 2000</td></tr></table></div>				Name		Eitan, Pearl, Latzer & Cohen-Zadek		Address		One Crystal Park, Suite 210, 2011 Crystal Drive		City		Arlington		Country		State	VA			Telephone	(703) 486-0600			Zip Code	22202-3709			Fax	(703) 486-0800	Name (Print/Type)	Mark S. Cohen	Registration No. (Attorney/Agent)	42,425	Signature		Date	27 November 2000
Name		Eitan, Pearl, Latzer & Cohen-Zadek																																					
Address		One Crystal Park, Suite 210, 2011 Crystal Drive																																					
City		Arlington																																					
Country		State	VA																																				
		Telephone	(703) 486-0600																																				
		Zip Code	22202-3709																																				
		Fax	(703) 486-0800																																				
Name (Print/Type)	Mark S. Cohen	Registration No. (Attorney/Agent)	42,425																																				
Signature		Date	27 November 2000																																				

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents,

11/27/00

JC772 U.S. PTO

JC813 U.S. PTO

09/721753

11/27/00

Approved for use through 10/31/2002. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL for FY 2001

Patent fees are subject to annual revision.

Complete if known

TOTAL AMOUNT OF PAYMENT (\$409.00

Application Number	
Filing Date	
First Named Inventor	KANTSCHUK, Amir
Examiner Name	
Group / Art Unit	
Attorney Docket No.	P-3750-US

METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:

Deposit Account Number: 05-0649

Deposit Account Name: Eitan, Pearl, Latzer & Cohen-Zedek

☒ Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17

☐ Applicant claims small entity status. See 37 CFR 1.27

2. ☐ Payment Enclosed:

☐ Check ☐ Credit card ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity Fee Code	Small Entity Fee Code	Fee (\$)	Fee Description	Fee Paid
101	710	201	355 Utility filing fee	355.00
106	320	206	160 Design filing fee	
107	490	207	245 Plant filing fee	
108	710	208	355 Reissue filing fee	
114	150	214	75 Provisional filing fee	
SUBTOTAL (1)				(\$355.00

2. EXTRA CLAIM FEES

Total Claims: 26 -20** = 6 Extra Claims

Independent Claims: -3** = 3

Multiple Dependent: X

Fee from Below: 9

Fee Paid: 54

Large Entity Fee Code	Small Entity Fee Code	Fee (\$)	Fee Description
103	18	203	9 Claims in excess of 20
102	80	202	40 Independent claims in excess of 3
104	270	204	135 Multiple dependent claim, if not paid
109	80	209	40 **Reissue independent claims over original patent
110	18	210	9 **Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$54.00

**or number previously paid, if greater; For Reissues, see above

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity Fee Code	Small Entity Fee Code	Fee (\$)	Fee Description	Fee Paid
105	130	205	65 Surcharge - late filing fee or oath	
127	80	227	25 Surcharge - late provisional filing fee or cover sheet	
138	130	138	130 Non-English specification	
147	2,520	147	2,520 For filing a request for ex parte reexamination	
112	920*	112	920* Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840* Requesting publication of SIR after Examiner action	
116	110	215	55 Extension for reply within first month	
116	390	216	195 Extension for reply within second month	
117	890	217	445 Extension for reply within third month	
118	1,390	218	695 Extension for reply within fourth month	
126	1,890	226	945 Extension for reply within fifth month	
119	310	219	165 Notice of Appeal	
120	310	220	155 Filing a brief in support of an appeal	
121	270	221	135 Request for oral hearing	
138	1,510	138	1,510 Petition to Institute a public use proceeding	
140	110	240	55 Petition to revive - unavoidable	
141	1,240	241	620 Petition to revive - unintentional	
142	1,240	242	620 Utility issue fee (or reissue)	
143	440	243	220 Design issue fee	
144	600	244	300 Plant issue fee	
122	130	122	130 Petitions to the Commissioner	
123	50	123	50 Petitions related to provisional applications	
126	240	126	240 Submission of Information Disclosure Stmt	
581	40	581	40 Recording each patent assignment per property (times number of properties)	
146	710	246	365 Filing a submission after final rejection (37 CFR 1.129(a))	
149	710	249	355 For each additional invention to be examined (37 CFR 1.129(b))	
179	710	279	355 Request for Continued Examination (RCE)	
189	900	189	900 Request for expedited examination of a design application	

Other fee (specify)

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$

SUBMITTED BY

Name (Print /Type)	Mark S. Cohen	Registration No. (Attorney/Agent)	42,425	Telephone	(703) 486-0600
Signature		Date	November 27, 2000		

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

TITLE OF THE INVENTION

Dynamic allocation of NEXT cancellation filters in a modem pool environment.

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a Continuation-In-Part application of U.S. Patent Application No. 09/510,550 filed February 22, 2000, and entitled "High Speed Access System Over Copper Cable Plant," that claims priority from United States Provisional Application Serial No. 60/121,228, filed February 23, 1999, and entitled "Access Express-Very High Data Rate Communication Channels Over Copper," both hereby incorporated by reference in their entirety.

FIELD OF THE INVENTION

The present invention relates to telecommunications systems in general, and more particularly to dynamic allocation of NEXT cancellation filters in a modem pool environment.

BACKGROUND OF THE INVENTION

The ever-increasing demand for high-speed data communications services and greater bandwidth is largely due to the popularity of the Internet and other data-intensive, high bandwidth applications. Both businesses and consumers are demanding higher bandwidth connections and faster Internet access. Another source for this demand is the increasing use by businesses of data communications networks, most notably the Internet, for the transmission of documents and electronic mail.

Digital Subscriber Line (DSL) technology provides one approach to addressing the demand for high-speed telecommunications service. DSL technology refers to several types of services that use advanced modem elements to transmit digital signals from a data source over

copper wires. Many telephone companies have embraced DSL technology as an immediate broadband solution to serve the current demand by getting more out of their existing copper infrastructure. DSL modem elements permit high data rate transmission of data over the access segment of the public switched telephone network (PSTN) at multiple megabit speeds using sophisticated signal processing techniques that permit voice and data to travel simultaneously over the same analog copper twisted pair wire.

One of the challenges facing DSL technology is that of near-end cross-talk (NEXT) cancellation. NEXT is defined as the cross-talk interference between the receiving path and the transmitting path of different transceivers at the same end of a communications channel that make use of wiring that shares the same cable. The NEXT effect in a cable depends on the number of interfering lines, and increases as the bandwidth that the signals occupy increases. In a modem pool environment where streams of data are distributed to many lines within a single, dedicated cable, the NEXT that the receivers need to overcome is mainly generated by the transmissions of the modem pool itself. Since such a system has access to the transmitted information for a plurality of modems, such information may be used to cancel the interference that leaks into the receivers, thus increasing the noise floor of each receiver.

Another cross-talk phenomena is known as far-end cross-talk (FEXT), which is defined as the cross-talk interference between the receiving path and the transmitting path of different transceivers at opposite ends of a communications channel that make use of wiring that shares the same cable.

In classic NEXT cancellation, a transmitter transmitting via one wire or wire grouping (e.g., twisted pair) affects the receiver receiving via another wire or wire grouping. For each transmit and receive path of an individual modem, a hybrid circuit separates the received signal from the transmitted interfering signal, but since the hybrid cannot completely separate the transmit

path from the receive path, some of the transmitted signal leaks into the receiver and becomes an interfering signal. A canceller then filters out the effect of the interfering signal, resulting in a "cleaned" received signal. For a single modem, this problem may be addressed using classic echo cancellation techniques. In a modem pool environment, however, where several modems transmit via a shared cable, there are currently no techniques that effectively address how each receiver takes into account all other interfering transmitters.

In a conventional approach for NEXT cancellation in a modem pool environment, all modems on both sides of the communications channel are activated, as are all adaptive NEXT filters, and the NEXT filters are allowed to converge over time. Unfortunately, in such an approach the received signal is comprised not only of NEXT, but of the far signal, self-echo, FEXT, and other noise as well. Since self-echo and the other noise components are collectively a much bigger factor than NEXT, the NEXT filters will necessarily converge more slowly and less efficiently than were other noise components not present. Furthermore, such systems are relatively complex to implement, since the number of filters required would equal the square of the number of modems in the pool.

SUMMARY OF THE INVENTION

The present invention seeks to provide techniques for dynamic allocation of NEXT cancellation filters in a modem pool environment. The dynamic allocation of NEXT cancellation filters in a modem pool is highly desirable where the number of NEXT cancellation filters available to the system is smaller than the number of disturbers influencing the modems' performance. The dynamic nature of the present invention adapts to environmental conditions and the physical behavior of copper pairs, where the NEXT transfer functions change over time.

In one aspect of the present invention, in a communications system having a modem pool for communicating via a communications channel, the modem pool including a plurality of modems and having a plurality A of NEXT cancellation filters, a method for NEXT cancellation filter allocation is provided including the steps of a) measuring NEXT impairment caused to at least one target modem among the plurality of modems by at least one disturber modem among the plurality of modems, b) allocating P filters among the A filters as probe filters, where $P \geq 1$, c) allocating at least one of the remaining $A-P$ filters among the filters to cancel NEXT from at least one disturber modem among the plurality of modems, and d) measuring, using at least one of the P probe filters, NEXT impairment caused to at least one target modem among the plurality of modems by at least one candidate disturber modem among the plurality of modems to which no $A-P$ filter is currently allocated.

In another aspect of the present invention the method further includes e) reallocating at least one currently allocated one of the $A-P$ filters to the P probe filters.

In another aspect of the present invention the reallocating step e) includes reallocating if the NEXT impairment caused by the candidate disturber modem is greater than the NEXT impairment caused by any other disturber modem among the plurality of modems to which an $A-P$ filter is currently allocated.

In another aspect of the present invention the measuring step includes measuring the NEXT impairment as the absolute sum of all NEXT cancellation filter coefficients of the filters.

In another aspect of the present invention the allocating step c) includes allocating in order of NEXT impairment from greater impairment to lower impairment.

In another aspect of the present invention the allocating step includes allocating any of the filters to only one of the modems.

In another aspect of the present invention the reallocating step includes reallocating any of the filters to only one of the modems.

In another aspect of the present invention the allocating step includes allocating any of the filters to at least two of the modems at different times.

In another aspect of the present invention the reallocating step includes reallocating any of the filters to at least two of the modems at different times.

In another aspect of the present invention the method further includes f) measuring the target modem's signal-to-noise ratio (SNR) prior to the allocating step b), and g) measuring the target modem's SNR once the probe filter has reached convergence, and where the reallocating step e) is performed if the SNR measured in step g) is greater than the SNR measured in step f).

In another aspect of the present invention the method further includes f) measuring the target modem's signal-to-noise ratio (SNR) and data rate prior to the allocating step b), and g) measuring the target modem's SNR once the probe filter has reached convergence, and h) estimating the target modem's data rate based on the SNR measured in step g), and where the reallocating step e) is performed if the data rate estimated in step h) is greater than the data rate measured in step f).

In another aspect of the present invention the estimating step h) is performed if the SNR measured in step g) is greater than the SNR measured in step f).

In another aspect of the present invention the plurality of modems number at least one more than the plurality of NEXT cancellation filters.

In another aspect of the present invention a communications system is provided including a modem pool for communicating via a communications channel, the modem pool including a plurality of modems and a plurality A of NEXT cancellation filters, the modem pool being operative to a) measure NEXT impairment caused to at least one target modem among the plurality of modems by at least one disturber modem among the plurality of modems, b) allocate P

filters among the A filters as probe filters, where $P \geq 1$, c) allocate at least one of the remaining $A-P$ filters among the filters to cancel NEXT from at least one disturber modem among the plurality of modems, and d) measure, using at least one of the P probe filters, NEXT impairment caused to at least one target modem among the plurality of modems by at least one candidate disturber modem among the plurality of modems to which no $A-P$ filter is currently allocated.

In another aspect of the present invention the modem pool is additionally operative to e) reallocate at least one currently allocated one of the $A-P$ filters to the P probe filters.

In another aspect of the present invention the modem pool is additionally operative to reallocate if the NEXT impairment caused by the candidate disturber modem is greater than the NEXT impairment caused by any other disturber modem among the plurality of modems to which an $A-P$ filter is currently allocated.

In another aspect of the present invention the modem pool is operative to measure the NEXT impairment as the absolute sum of all NEXT cancellation filter coefficients of the filters.

In another aspect of the present invention the modem pool is operative to allocate any of the $A-P$ filters in order of NEXT impairment from greater impairment to lower impairment.

In another aspect of the present invention the modem pool is operative to allocate any of the filters to only one of the modems.

In another aspect of the present invention the modem pool is operative to reallocate any of the filters to only one of the modems.

In another aspect of the present invention the modem pool is operative to allocate any of the filters to at least two of the modems at different times.

In another aspect of the present invention the modem pool is operative to reallocate any of the filters to at least two of the modems at different times.

In another aspect of the present invention the modem pool is operative to f) measure the target modem's signal-to-noise ratio (SNR) prior to performing the allocating step b), and g) measure the target modem's SNR once the probe filter has reached convergence, and perform the reallocating step e) if the SNR measured in step g) is greater than the SNR measured in step f).

In another aspect of the present invention the modem pool is operative to f) measure the target modem's signal-to-noise ratio (SNR) and data rate prior to performing the allocating step b), and g) measure the target modem's SNR once the probe filter has reached convergence, and h) estimate the target modem's data rate based on the SNR measured in step g), and perform the reallocating step e) if the data rate estimated in step h) is greater than the data rate measured in step f).

In another aspect of the present invention the modem pool is operative to perform the estimating step h) if the SNR measured in step g) is greater than the SNR measured in step f).

In another aspect of the present invention the plurality of modems number at least one more than the plurality of NEXT cancellation filters.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood and appreciated more fully from the following detailed description taken in conjunction with the appended drawings in which:

Fig. 1 is a pictorial illustration of a modem pool arrangement useful in understanding the present invention;

Fig. 2 is a flowchart illustration of a method of modem wake-up of the system of Fig. 1, useful in understanding the present invention;

Fig. 3 is a pictorial illustration of a NEXT transfer function matrix constructed using the method of Fig. 2;

Fig. 4 is a flowchart illustration of a method of modem wake-up of the system of Fig. 1, useful in understanding the present invention;

Fig. 5 is a flowchart illustration of a method of dynamic allocation of NEXT cancellation filters, operative in accordance with a preferred embodiment of the present invention;

Fig. 6 is a flowchart illustration of a method of NEXT cancellation filter reallocation, operative in accordance with a preferred embodiment of the present invention;

Fig. 7 is a flowchart illustration of a method of NEXT cancellation filter reallocation, operative in accordance with a preferred embodiment of the present invention;

Fig. 8 is a flowchart illustration of a method of NEXT cancellation filter reallocation, operative in accordance with a preferred embodiment of the present invention; and

Fig. 9 is a flowchart illustration of a method of dynamic allocation of NEXT cancellation filters, operative in accordance with a preferred embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Reference is now made to Fig. 1 which is a pictorial illustration of a modem pool arrangement useful in understanding the present invention. A first modem pool, generally referenced 10, and comprising a plurality of individual modems is seen in communication with a second modem pool, generally referenced 12, via a plurality of connections 14 over a telephone network 16. Connections 14 are typically copper wire pairs arranged in one or more bundles 18. Modem pools 10 and 12 typically operate from central office (CO) and remote terminal (RT) locations respectively, and are alternatively referred to herein as CO 10 and RT 12. The modem pools preferably operate in a coordinated manner, such as is described in Applicant/assignee's U.S. Patent Application No. 09/510,550 filed February 22, 2000, and entitled "High Speed Access System Over Copper Cable Plant," that claims priority from United States Provisional Application

Serial No. 60/121,228, filed February 23, 1999, and entitled "Access Express-Very High Data Rate Communication Channels Over Copper," both hereby incorporated by reference in their entirety.

Each modem pool in Fig. 1 typically includes one or more NEXT cancellation filters 20 and 22 respectively, the operation of which is described in greater detail hereinbelow with reference to Fig. 2. It is a particular feature of the present invention that, in a modem pool of N modems, less than N^2 NEXT cancellation filters may be used in support of NEXT cancellation.

Reference is now made to Fig. 2, which is a flowchart illustration of a method of modem wake-up of the system of Fig. 1, useful in understanding the present invention. In the method of Fig. 2 the modems of CO 10 and RT 12 are powered-up (step 200), and communications links are established between CO 10 and RT 12, typically at their minimum transmission rate (step 202). A system control channel is then established using at least one of the communication links (step 204). CO 10 then transfers a predetermined wake-up time limit, T_{wu} , to RT 12 using the control channel (step 206). Once T_{wu} is received at RT 12, one or more, and preferably all, of the RT 12 modems are deactivated and thereby prevented from communicating with CO 10, typically by placing the modem in a receive-only mode or by turning the modem off (step 208).

During a first time period T_{wu} , referred to as CO_{wu} , one or more, and preferably all, of the modems at CO 10 are activated, typically such that the transmitted signal occupies the entire usable bandwidth, such as by operating at their maximum transmission rate and/or maximum power (step 210). Throughout this phase the copper lines are preferably used in a simplex mode. The n NEXT cancellation filters 20 at CO 10 are activated for a single target modem, and the NEXT transfer function is measured and recorded, typically in a central database, for the target modem and each of up to n "disturber" modems of the CO 10 modem pool (step 212). Each NEXT transfer function may be measured in the time domain and/or the frequency domain, and reflects the NEXT experienced by the target modem due to a disturber modem with which the target modem is paired

during the measurement. NEXT measurement may be accomplished by an adaptive FIR filter, trained to mimic the cross lines transfer function. Step 212 may be repeated for several NEXT measurement cycles, particularly where there are fewer NEXT cancellation filters than disturber modems (step 214). The NEXT cancellation filters 20 preferably measure different modem pairs during each cycle, provided that CO_{wu} hasn't elapsed. For example, if there are 25 filters available to measure the NEXT from 100 potential disturber modems, four measurement cycles would be required for each modem being measured.

Once the CO_{wu} time period has elapsed, one or more, and preferably all, of the modems at CO 10 are deactivated and thereby prevented from communicating with RT 12, typically by placing the modem in a receive-only mode or by turning the modem off (step 216), and steps 210 - 214 may be repeated for the modems at RT 12 for an additional T_{wu} time period, referred to as RT_{wu} . One or more, and preferably all, of the modems at RT 12 are activated, typically such that the transmitted signal occupies the entire usable bandwidth, such as by operating at their maximum transmission rate and/or maximum power (step 218), the m NEXT cancellation filters 22 at RT 12 are activated for a single target modem, and the NEXT transfer function is measured and recorded for the target modem and each of up to m disturber modems of the RT 12 modem pool (step 220), with step 220 being repeated for several NEXT measurement cycles as necessary to measure one or more, and preferably all, of target modem-disturber pairs prior to the RT_{wu} time period elapsing (step 222).

The NEXT measurements taken during the wake-up process are thus free of far signal and FEXT noise components and may be subsequently used to initialize the NEXT cancellation filters when beginning normal operation. Preferably, after the method of Fig. 2 is carried out, CO 10 and RT 12 configure their modems to a stable, agreed-upon, or otherwise predetermined rate (e.g. their minimum transmission rates) and re-establish a control channel. CO 10 then activates its

NEXT cancellation filters for one or more, and preferably all, of its modems and instructs RT 12 to likewise activate its NEXT cancellation filters for one or more, and preferably all, of its modems. The NEXT cancellation filters then converge and begin canceling NEXT based on the NEXT transfer functions measured during wake-up. Preferred methods of NEXT cancellation are described in Assignee's U.S. Patent Application No. 09/643,821 entitled "Next Cancellation for Modem Pools" and filed on August 22, 2000, hereby incorporated by reference in its entirety. The NEXT cancellation filter's convergence criteria may be based on error signal of the filter adaptation process using conventional techniques.

As an alternative to steps 204 and 206 above, the time periods T_{wu} or RT_{wu} may be preset at RT 12, and not communicated to RT 12 by CO 10. CO_{wu} may likewise be preset at CO 10. Furthermore, CO_{wu} and RT_{wu} need not be of equal length.

Reference is now made to Fig. 3, which is a pictorial illustration of a NEXT transfer function matrix constructed using the method of Fig. 2. As is shown in Fig. 3, for one or more, and preferably all, of the modems i in a modem pool, the method of Fig. 2 may be used to determine the NEXT transfer function vector for one or more, and preferably all, disturber modems j . The wake-up time limit T_{wu} is preferably of a sufficient length for the complete NEXT transfer function matrix of Fig. 3 to be constructed in one or more measurement cycles as described hereinabove.

Reference is now made to Fig. 4, which is a flowchart illustration of a method of modem wake-up of the system of Fig. 1, useful in understanding the present invention. The method of Fig. 4 is substantially similar to the method of Fig. 2 with the notable exception that the target modem whose NEXT is being measured is set to receive-only mode while one or more, and preferably all, other modems are activated at their maximum transmission rate and maximum power. Setting one modem to receive-only and one or more, and preferably all, potential disturbers

to transmit ensures that only disturber NEXT is measured, and that the self-echo of the target modem is eliminated as a noise component.

Reference is now made to Fig. 5, which is a flowchart illustration of a method of dynamic allocation of NEXT cancellation filters, operative in accordance with a preferred embodiment of the present invention. The method of Fig. 5 may be applied to CO 10 or RT 12 of Fig. 1, or to both modem pools, and is typically applied subsequent to performing modem wake-up, such as is described hereinabove with reference to Figs. 2 and 4. The method of Fig. 5 is particularly useful where there are fewer NEXT cancellation filters available to a given target modem for canceling the NEXT from disturber modems than there are disturber modems, and where the number of NEXT cancellation filters available for a given modem is fixed.

In the method of Fig. 5 a disturber table is maintained for each modem in the modem pool, indicating the level of NEXT impairment that the modem experiences from other disturber modems in the modem pool (step 500). The NEXT impairment may be quantified using any known NEXT quantification technique, or as follows. For a target modem i and a disturber modem j having a NEXT cancellation filter with h coefficients, the NEXT impairment may be expressed as the absolute sum of all NEXT cancellation filter coefficients as follows:

$$\text{NEXT Impairment}_{ij} = \sum_{k=1}^h |C_{i,j}(k)|$$

The NEXT cancellation measurement assumes that for each NEXT cancellation filter the greater the absolute sum of the NEXT cancellation filter coefficients, the greater the increase in the NEXT effect of disturber j on target modem i . Thus, canceling the NEXT from disturber j will improve the modem i SNR more significantly than canceling the NEXT from disturber k , having a lower NEXT impairment value.

Where there are A NEXT cancellation filters available for a target modem having N potential disturbers, and $A < N$, P filters are preferably allocated as probe filters (step 502) where

$P \geq 1$, and one or more, and preferably all, of the remaining $A-P$ (" A minus P ") filters are allocated to cancel NEXT from disturber modems, with the assignments being recorded in the disturber table (step 504). The allocation of filters to disturbers is preferably performed in order of NEXT impairment, from greater impairment to lower impairment.

After modem wake-up and initial NEXT cancellation filter allocation, and preferably throughout steady state, the P probe filters cycle through one or more, and preferably all, of the $N-A-P$ (" N minus A minus P ") disturber modems to which NEXT cancellation filters have not been allocated and measure the NEXT impairment caused by those disturber modems, with the NEXT impairment measurements being recorded in the disturber table (step 506). At any time during probing, and preferably after every C complete probing cycles where all $N-A-P$ disturber modems have been measured, where $C \geq 1$, the disturber table is reviewed to determine whether the $A-P$ disturber modems causing the greatest NEXT impairment are those to which the $A-P$ NEXT cancellation filters have been allocated (step 508). If the $A-P$ NEXT cancellation filters are currently allocated to the $A-P$ disturber modems causing the greatest NEXT impairment, then no reallocation is necessary (step 510). If, however, one or more of the $A-P$ disturber modems causing the greatest NEXT impairment does not currently have a NEXT cancellation filter allocated to it, hereinafter referred to as a "candidate" disturber, NEXT cancellation filter reallocation is performed (step 512), preferably using one of the methods described hereinbelow with reference to Figs. 6, 7, and 8.

Reference is now made to Fig. 6, which is a flowchart illustration of a method of NEXT cancellation filter reallocation, operative in accordance with a preferred embodiment of the present invention. In the method of Fig. 6 the target modem's signal-to-noise ratio (SNR) is measured using conventional techniques, such as using the modem's internal SNR meter (step 600), and one of the P probe filters is allocated to one of the candidate disturbers and begins NEXT cancellation (step

602). Once the candidate probe filter has reached convergence, the target modem's signal-to-noise ratio (SNR) is again measured (step 604). If the target modem's SNR has improved, preferably by a pre-defined value or percentage, then the probe filter joins the ranks of the allocated filters and continues filtering the candidate disturber NEXT (step 606). The NEXT cancellation filter which is currently allocated to a disturber modem causing the least NEXT impairment is then released from its disturber modem and becomes a probe in place of the newly-allocated probe filter (step 608). If the target modem's SNR has not improved, then the probe filter is released from the candidate disturber (step 610). Steps 600 - 610 may be repeated for each candidate disturber among the A - P disturber modems causing the greatest NEXT impairment.

Reference is now made to Fig. 7, which is a flowchart illustration of a method of NEXT cancellation filter reallocation, operative in accordance with a preferred embodiment of the present invention. In the method of Fig. 7 the target modem's signal-to-noise ratio (SNR) and data rate are measured using conventional techniques (step 700), and one of the P probe filters is allocated to one of the candidate disturbers and begins NEXT cancellation (step 702). Once the candidate probe filter has reached convergence, the target modem's signal-to-noise ratio (SNR) is again measured (step 704). If the target modem's SNR has improved, preferably by a pre-defined value or percentage, then the target modem's data rate is estimated using conventional techniques, such as based on a pre-determined relationship between modem SNR and data rate. (step 706). If the target modem's estimated data rate shows an improvement, preferably by a pre-defined value or percentage, then the probe filter joins the ranks of the allocated filters and continues filtering the candidate disturber NEXT (step 708). The NEXT cancellation filter which is currently allocated to a disturber modem causing the least NEXT impairment is then released from its disturber modem and becomes a probe in place of the newly-allocated probe filter (step 710). If the target modem's SNR and/or estimated data rate does not show an improvement, then the probe filter is released from the

candidate disturber (step 712). Steps 700 - 712 may be repeated for each candidate disturber among the *A-P* disturber modems causing the greatest NEXT impairment.

Reference is now made to Fig. 8, which is a flowchart illustration of a method of NEXT cancellation filter reallocation, operative in accordance with a preferred embodiment of the present invention. In the method of Fig. 8 one of the *P* probe filters is allocated to one of the candidate disturbers and begins NEXT cancellation (step 800). Once the candidate probe filter has reached convergence, the NEXT impairment caused by the candidate disturber is measured, preferably using the absolute sum function described hereinabove with reference to Fig. 5 (step 802). If the NEXT impairment caused by the candidate disturber is greater than the NEXT impairment caused by any of the *A-P* disturber modems, then the probe filter joins the ranks of the allocated filters and continues filtering the candidate disturber NEXT (step 804). The NEXT cancellation filter which is currently allocated to a disturber modem causing the least NEXT impairment is then released from its disturber modem and becomes a probe in place of the newly-allocated probe filter (step 806). If the NEXT impairment caused by the candidate disturber is not greater than the NEXT impairment caused by any of the *A-P* disturber modems, then the probe filter is released from the candidate disturber (step 808). Steps 800 - 808 may be repeated for each candidate disturber among the *A-P* disturber modems causing the greatest NEXT impairment.

Reference is now made to Fig. 9, which is a flowchart illustration of a method of dynamic allocation of NEXT cancellation filters, operative in accordance with a preferred embodiment of the present invention. The method of Fig. 9 may be applied to CO 10 or RT 12 of Fig. 1, or to both modem pools, and is typically applied subsequent to performing modem wake-up, such as is described hereinabove with reference to Figs. 2 and 4. The method of Fig. 9 is particularly useful where there are fewer NEXT cancellation filters available for canceling the NEXT from disturber modems than there are disturber modems. The method of Fig. 9 differs from

the method of Fig. 5 mainly in that each NEXT cancellation filter may be assigned to different target modems at different times, and that the number of NEXT cancellation filters available for a given modem may vary.

In the method of Fig. 9 a consolidated disturber table is maintained for all modems in the modem pool, or for a subset of modems, indicating the level of NEXT impairment that each modem experiences from other disturber modems in the modem pool (step 900). The NEXT impairment may be quantified using any known NEXT quantification technique, or using the absolute sum function described hereinabove with reference to Fig. 5

Where there are A NEXT cancellation filters available for M modems, each modem having N potential disturbers, and $A < (M*N)$, P filters are preferably allocated as probe filters (step 902) where $P \geq 1$, and one or more, and preferably all, of the remaining $A-P$ (" A minus P ") filters are allocated to cancel NEXT from disturber modems, with the assignments being recorded in the disturber table (step 904). The allocation of filters to disturbers is preferably performed in order of NEXT impairment, from greatest to lowest.

After modem wake-up and initial NEXT cancellation filter allocation, and preferably throughout steady state, the P probe filters cycle through one or more, and preferably all, of the $(M*N)-A-P$ (" M times N) minus A minus P ") disturber modems to which NEXT cancellation filters have not been allocated and measure the NEXT impairment caused by those disturber modems, with the NEXT impairment measurements being recorded in the disturber table (step 906). At any time during probing, and preferably after every C complete probing cycles where all $(M*N)-A-P$ disturber modems have been measured, where $C \geq 1$, the disturber table is reviewed to determine whether the $A-P$ disturber modems causing the greatest NEXT impairment are those to which the $A-P$ NEXT cancellation filters have been allocated (step 908). If the $A-P$ NEXT cancellation filters are currently allocated to the $A-P$ disturber modems causing the greatest NEXT impairment, then no

reallocation is necessary (step 910). If, however, one or more of the A - P disturber modems causing the greatest NEXT impairment does not currently have a NEXT cancellation filter allocated to it, hereinafter referred to as a "candidate" disturber, NEXT cancellation filter reallocation is performed (step 912), preferably using one of the methods described hereinabove with reference to Figs. 6, 7, and 8. Whichever NEXT cancellation filter reallocation method is used, the data rate of the target modem relative to the data rate of other modems in the modem pool or subset may be taken into account when considering reallocating a NEXT cancellation filter to the target modem. For example, weighting may be used to favor reallocating a NEXT cancellation filter to a candidate disturber of a higher data rate modem over a candidate disturber of a lower data rate modem even when the latter candidate disturber causes greater NEXT impairment than the former candidate disturber. In general, a NEXT cancellation filter reallocation that is based on a target modem's data rate is desirable where it would increase the aggregated bandwidth of the modem pool or system.

It is appreciated that, in any of the methods described herein, if the ranks of the A - P disturber modems causing the greatest NEXT impairment change more rapidly than the NEXT cancellation filter reallocation techniques can adjust for, one or more probe filters may be made available for candidate disturbers, while one or more probes may continuously probe the N - A - P disturbers and update the disturbers table.

It is appreciated that one or more of the steps of any of the methods described herein may be omitted or carried out in a different order than that shown, without departing from the true spirit and scope of the invention.

It is appreciated that the methods and apparatus described herein may be implemented using computer hardware and/or software using conventional techniques.

While the present invention has been described with reference to a few specific embodiments, the description is intended to be illustrative of the invention as a whole and is not to

P-3750-US

be construed as limiting the invention to the embodiments shown. It is appreciated that various modifications may occur to those skilled in the art that, while not specifically shown herein, are nevertheless within the true spirit and scope of the invention.

CLAIMS

What is claimed is:

1. In a communications system having a modem pool for communicating via a communications channel, the modem pool comprising a plurality of modems and having a plurality A of NEXT cancellation filters, a method for NEXT cancellation filter allocation comprising the steps of:

- a) measuring NEXT impairment caused to at least one target modem among said plurality of modems by at least one disturber modem among said plurality of modems;
- b) allocating P filters among said A filters as probe filters, where $P \geq 1$;
- c) allocating at least one of the remaining $A-P$ filters among said filters to cancel NEXT from at least one disturber modem among said plurality of modems; and
- d) measuring, using at least one of said P probe filters, NEXT impairment caused to at least one target modem among said plurality of modems by at least one candidate disturber modem among said plurality of modems to which no $A-P$ filter is currently allocated.

2. A method according to claim 1 and further comprising:

- e) reallocating at least one currently allocated one of said $A-P$ filters to said P probe filters.

3. A method according to claim 2 wherein said reallocating step e) comprises reallocating if the NEXT impairment caused by said candidate disturber modem is greater than the NEXT impairment caused by any other disturber modem among said plurality of modems to which an $A-P$ filter is currently allocated.

4. A method according to claim 1 wherein said measuring step comprises measuring said NEXT impairment as the absolute sum of all NEXT cancellation filter coefficients of said filters.
5. A method according to claim 1 wherein said allocating step c) comprises allocating in order of NEXT impairment from greater impairment to lower impairment.
6. A method according to claim 1 wherein said allocating step comprises allocating any of said filters to only one of said modems.
7. A method according to claim 2 wherein said reallocating step comprises reallocating any of said filters to only one of said modems.
8. A method according to claim 1 wherein said allocating step comprises allocating any of said filters to at least two of said modems at different times.
9. A method according to claim 1 wherein said reallocating step comprises reallocating any of said filters to at least two of said modems at different times.
10. A method according to claim 2 and further comprising:
 - f) measuring said target modem's signal-to-noise ratio (SNR) prior to said allocating step b); and
 - g) measuring said target modem's SNR once said probe filter has reached convergence,

and wherein said reallocating step e) is performed if said SNR measured in step g) is greater than said SNR measured in step f).

11. A method according to claim 2 and further comprising:

f) measuring said target modem's signal-to-noise ratio (SNR) and data rate prior to said allocating step b); and

g) measuring said target modem's SNR once said probe filter has reached convergence; and

h) estimating said target modem's data rate based on said SNR measured in step g),

and wherein said reallocating step e) is performed if said data rate estimated in step h) is greater than said data rate measured in step f).

12. A method according to claim 11 wherein said estimating step h) is performed if said SNR measured in step g) is greater than said SNR measured in step f).

13. A method according to claim 1 wherein said plurality of modems number at least one more than said plurality of NEXT cancellation filters.

14. A communications system comprising:

a modem pool for communicating via a communications channel, said modem pool comprising a plurality of modems and a plurality A of NEXT cancellation filters, said modem pool being operative to:

a) measure NEXT impairment caused to at least one target modem among said plurality of modems by at least one disturber modem among said plurality of modems;

b) allocate P filters among said A filters as probe filters, where $P \geq 1$;

c) allocate at least one of the remaining $A-P$ filters among said filters to cancel NEXT from at least one disturber modem among said plurality of modems; and

d) measure, using at least one of said P probe filters, NEXT impairment caused to at least one target modem among said plurality of modems by at least one candidate disturber modem among said plurality of modems to which no $A-P$ filter is currently allocated.

15. A system according to claim 14 wherein said modem pool is additionally operative to:

e) reallocate at least one currently allocated one of said $A-P$ filters to said P probe filters.

16. A system according to claim 14 wherein said modem pool is additionally operative to reallocate if the NEXT impairment caused by said candidate disturber modem is greater than the NEXT impairment caused by any other disturber modem among said plurality of modems to which an $A-P$ filter is currently allocated.

17. A system according to claim 14 wherein said modem pool is operative to measure said NEXT impairment as the absolute sum of all NEXT cancellation filter coefficients of said filters.

18. A system according to claim 14 wherein said modem pool is operative to allocate any of said $A-P$ filters in order of NEXT impairment from greater impairment to lower impairment.

19. A system according to claim 14 wherein said modem pool is operative to allocate any of said filters to only one of said modems.

20. A system according to claim 14 wherein said modem pool is operative to reallocate any of said filters to only one of said modems.

21. A system according to claim 14 wherein said modem pool is operative to allocate any of said filters to at least two of said modems at different times.

22. A system according to claim 14 wherein said modem pool is operative to reallocate any of said filters to at least two of said modems at different times.

23. A system according to claim 15 wherein said modem pool is operative to:

f) measure said target modem's signal-to-noise ratio (SNR) prior to performing said allocating step b); and

g) measure said target modem's SNR once said probe filter has reached convergence, and perform said reallocating step e) if said SNR measured in step g) is greater than said SNR measured in step f).

24. A system according to claim 15 wherein said modem pool is operative to:

f) measure said target modem's signal-to-noise ratio (SNR) and data rate prior to performing said allocating step b); and

g) measure said target modem's SNR once said probe filter has reached convergence; and

h) estimate said target modem's data rate based on said SNR measured in step g),

and perform said reallocating step e) if said data rate estimated in step h) is greater than said data rate measured in step f).

25. A system according to claim 24 wherein said modem pool is operative to perform said estimating step h) if said SNR measured in step g) is greater than said SNR measured in step f).

26. A system according to claim 14 wherein said plurality of modems number at least one more than said plurality of NEXT cancellation filters.

ABSTRACT OF THE DISCLOSURE

In a communications system having a modem pool for communicating via a communications channel, the modem pool including a plurality of modems and having a plurality A of NEXT cancellation filters, a) measuring NEXT impairment caused to at least one target modem among the plurality of modems by at least one disturber modem among the plurality of modems, b) allocating P filters among the A filters as probe filters, where $P \geq 1$, c) allocating at least one of the remaining $A-P$ filters among the filters to cancel NEXT from at least one disturber modem among the plurality of modems, and d) measuring, using at least one of the P probe filters, NEXT impairment caused to at least one target modem among the plurality of modems by at least one candidate disturber modem among the plurality of modems to which no $A-P$ filter is currently allocated.

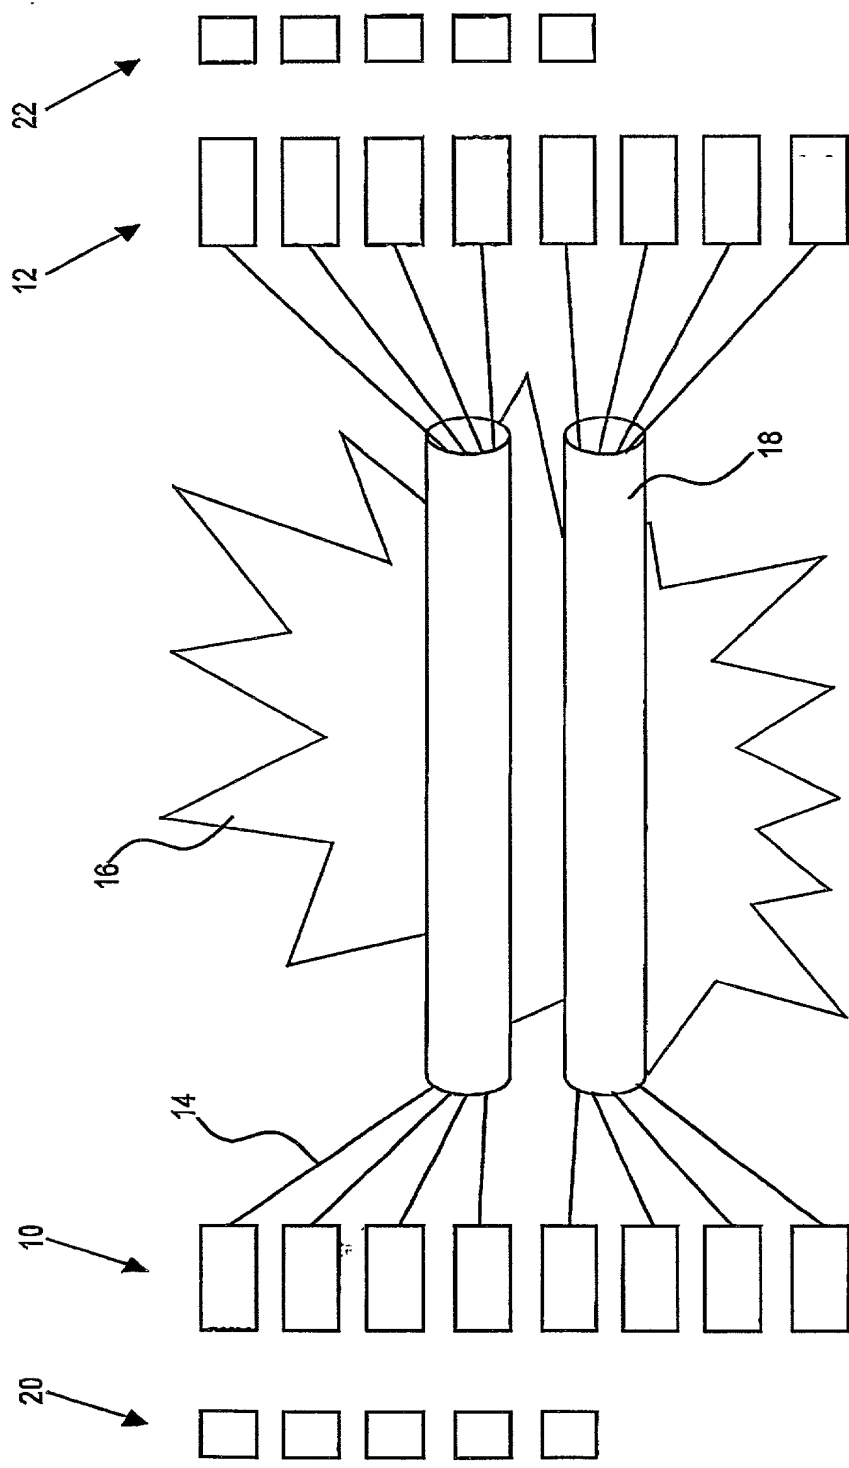


Fig. 1

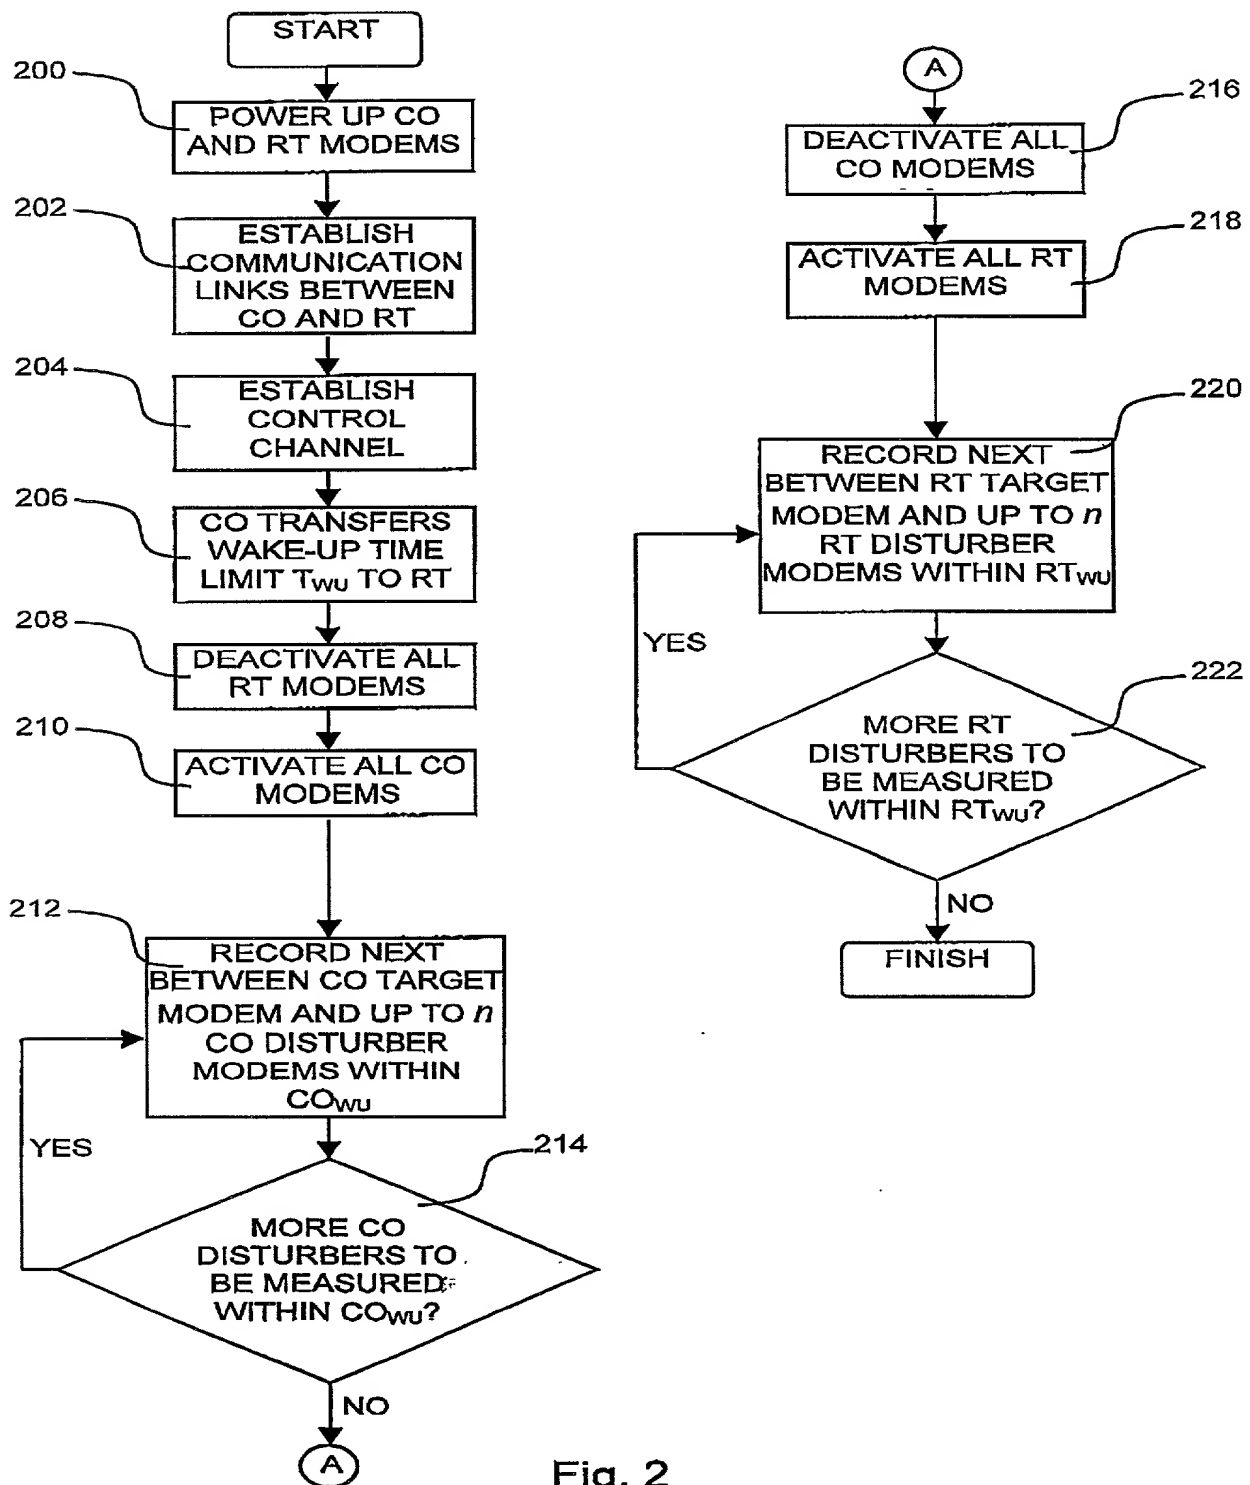


Fig. 2

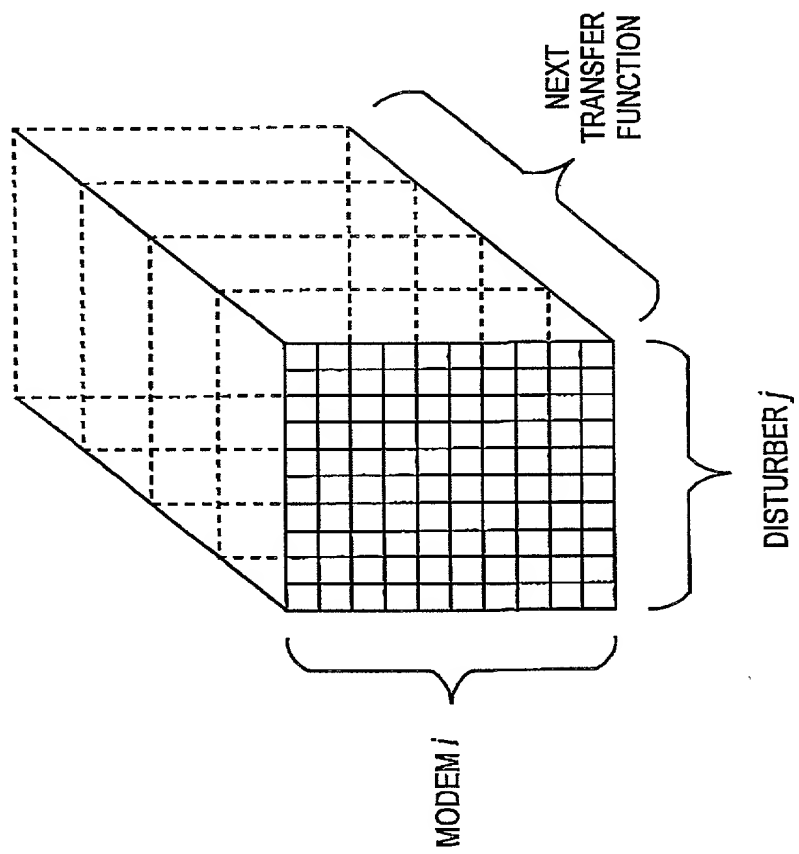


Fig. 3

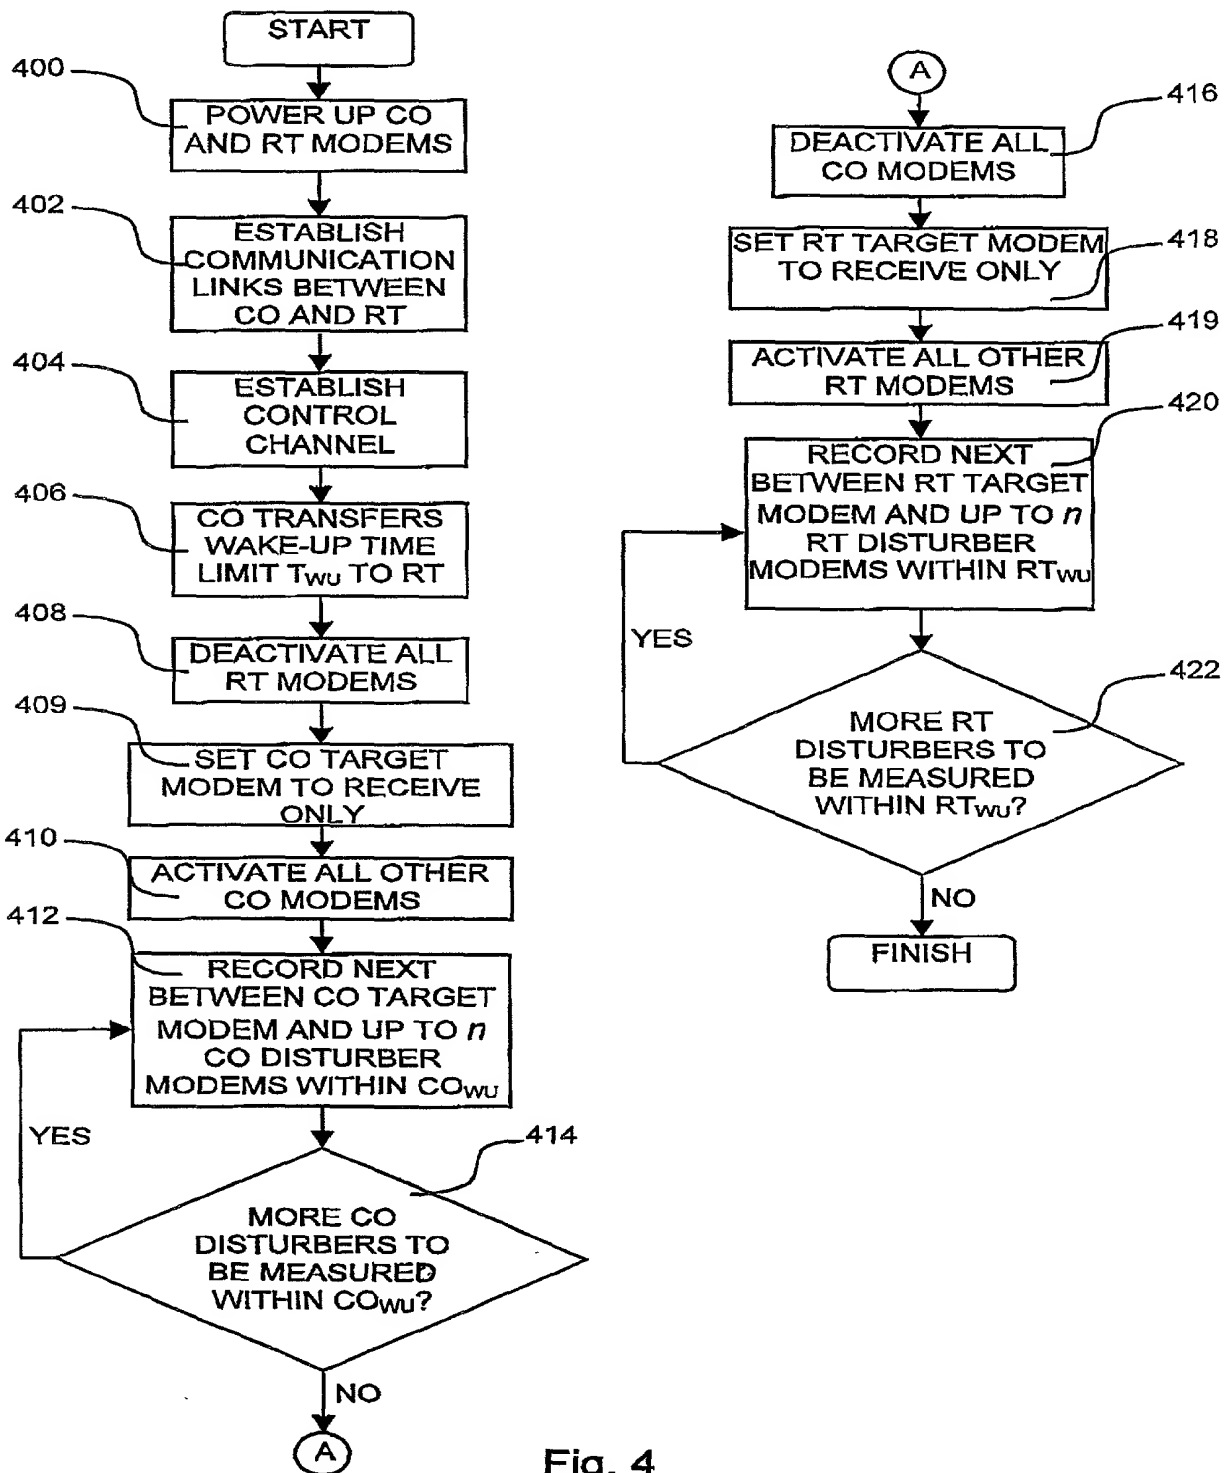


Fig. 4

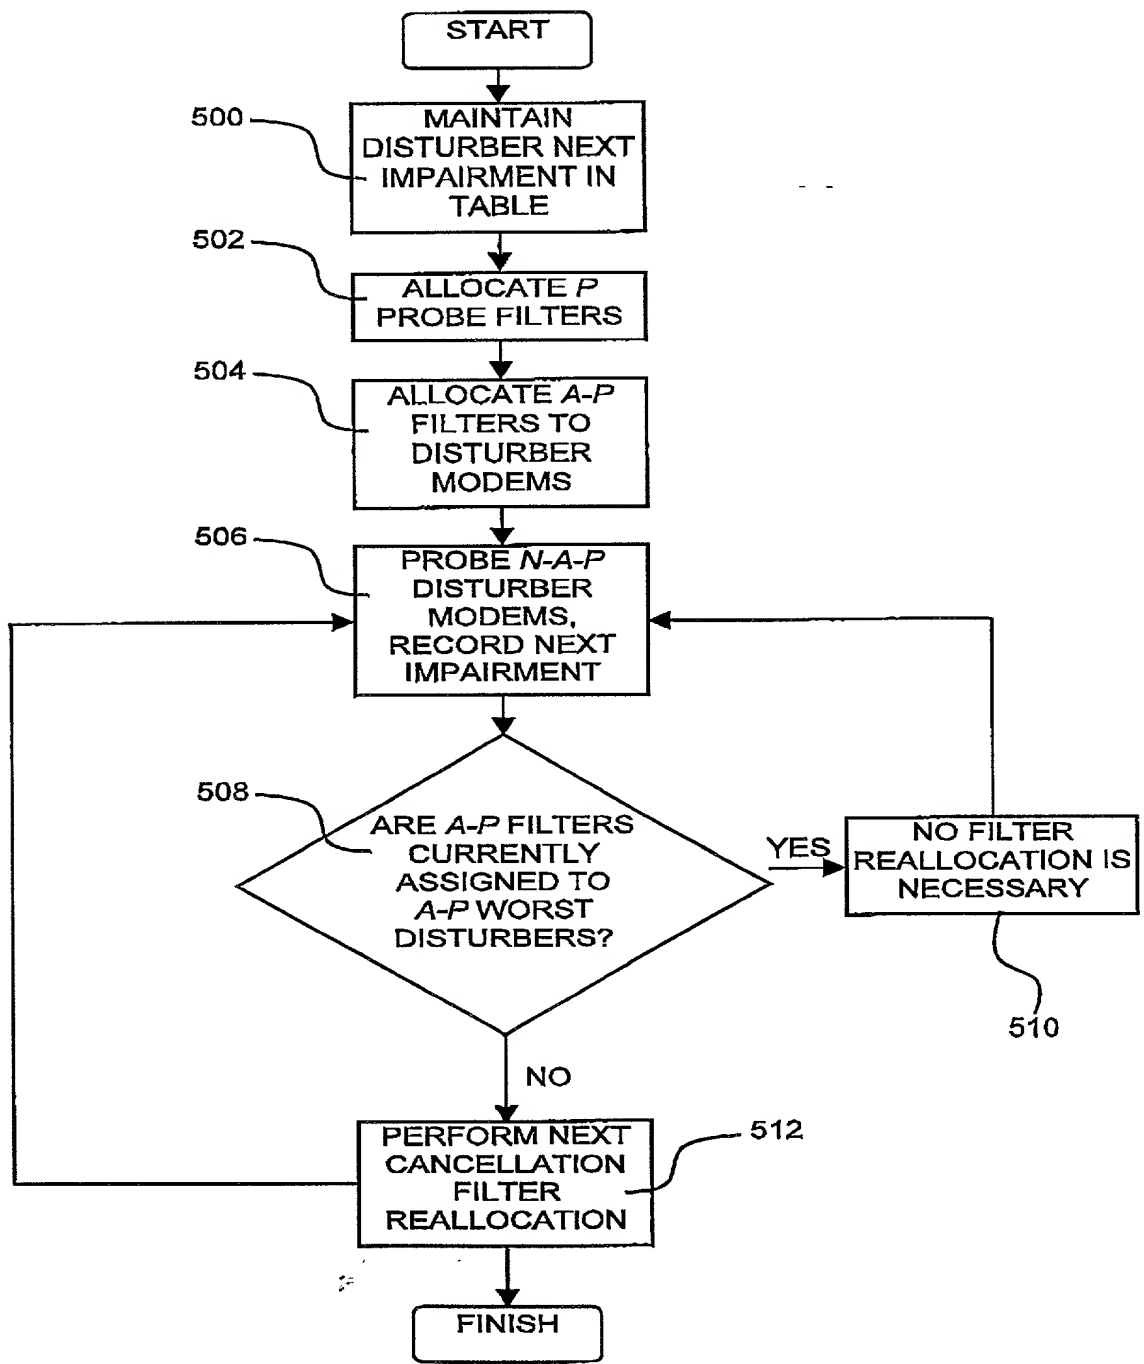


Fig. 5

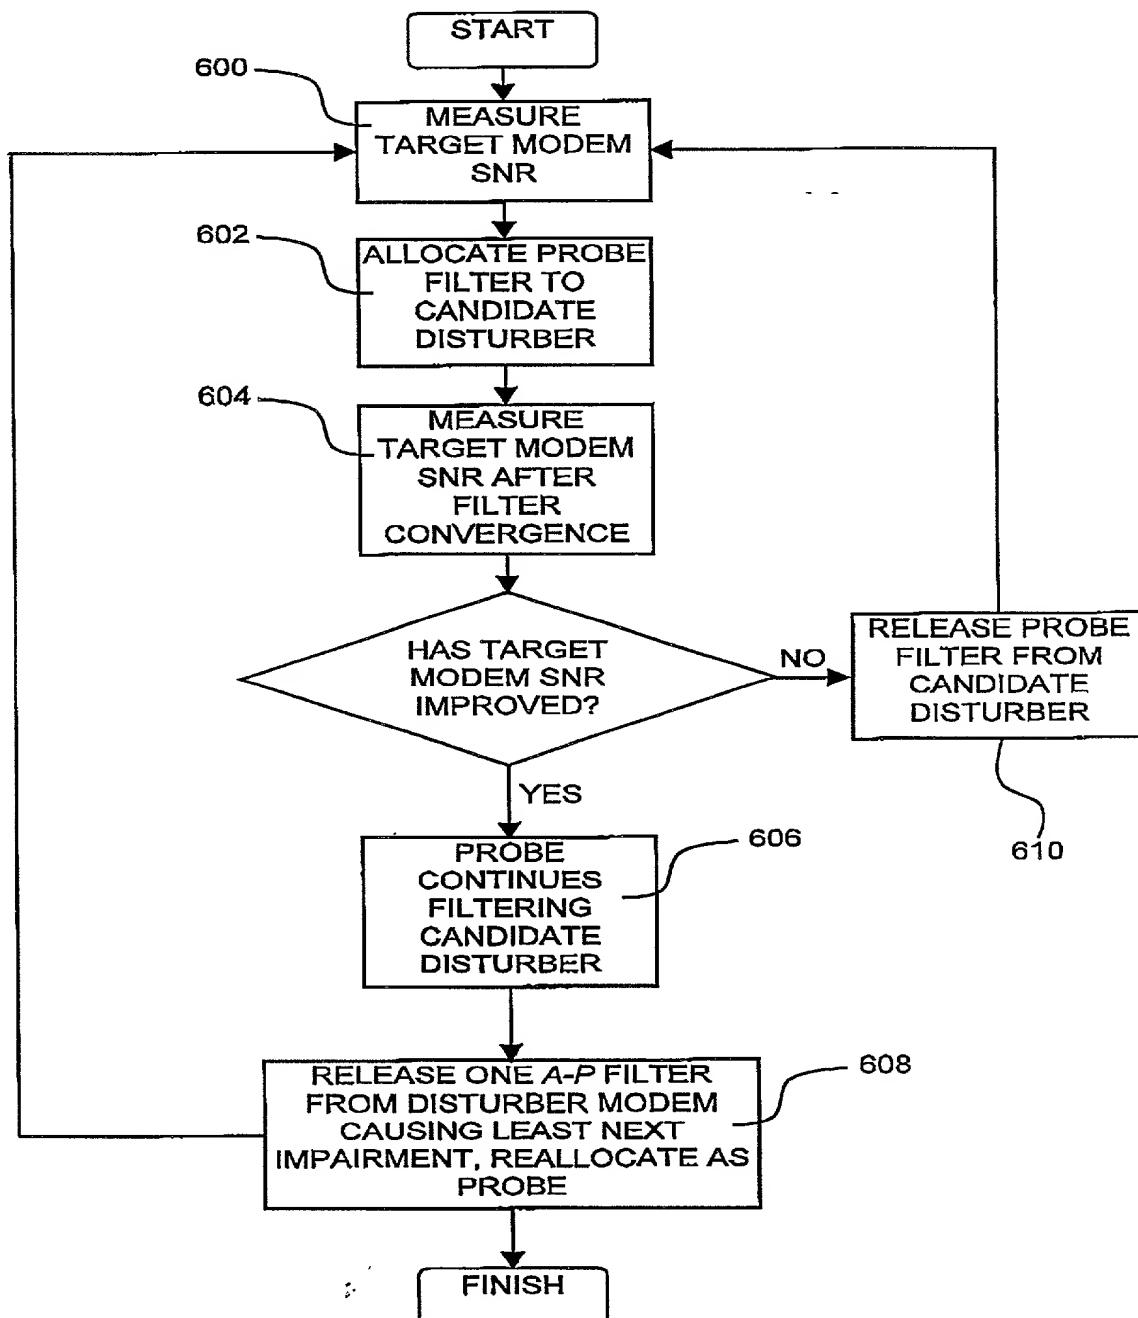


Fig. 6

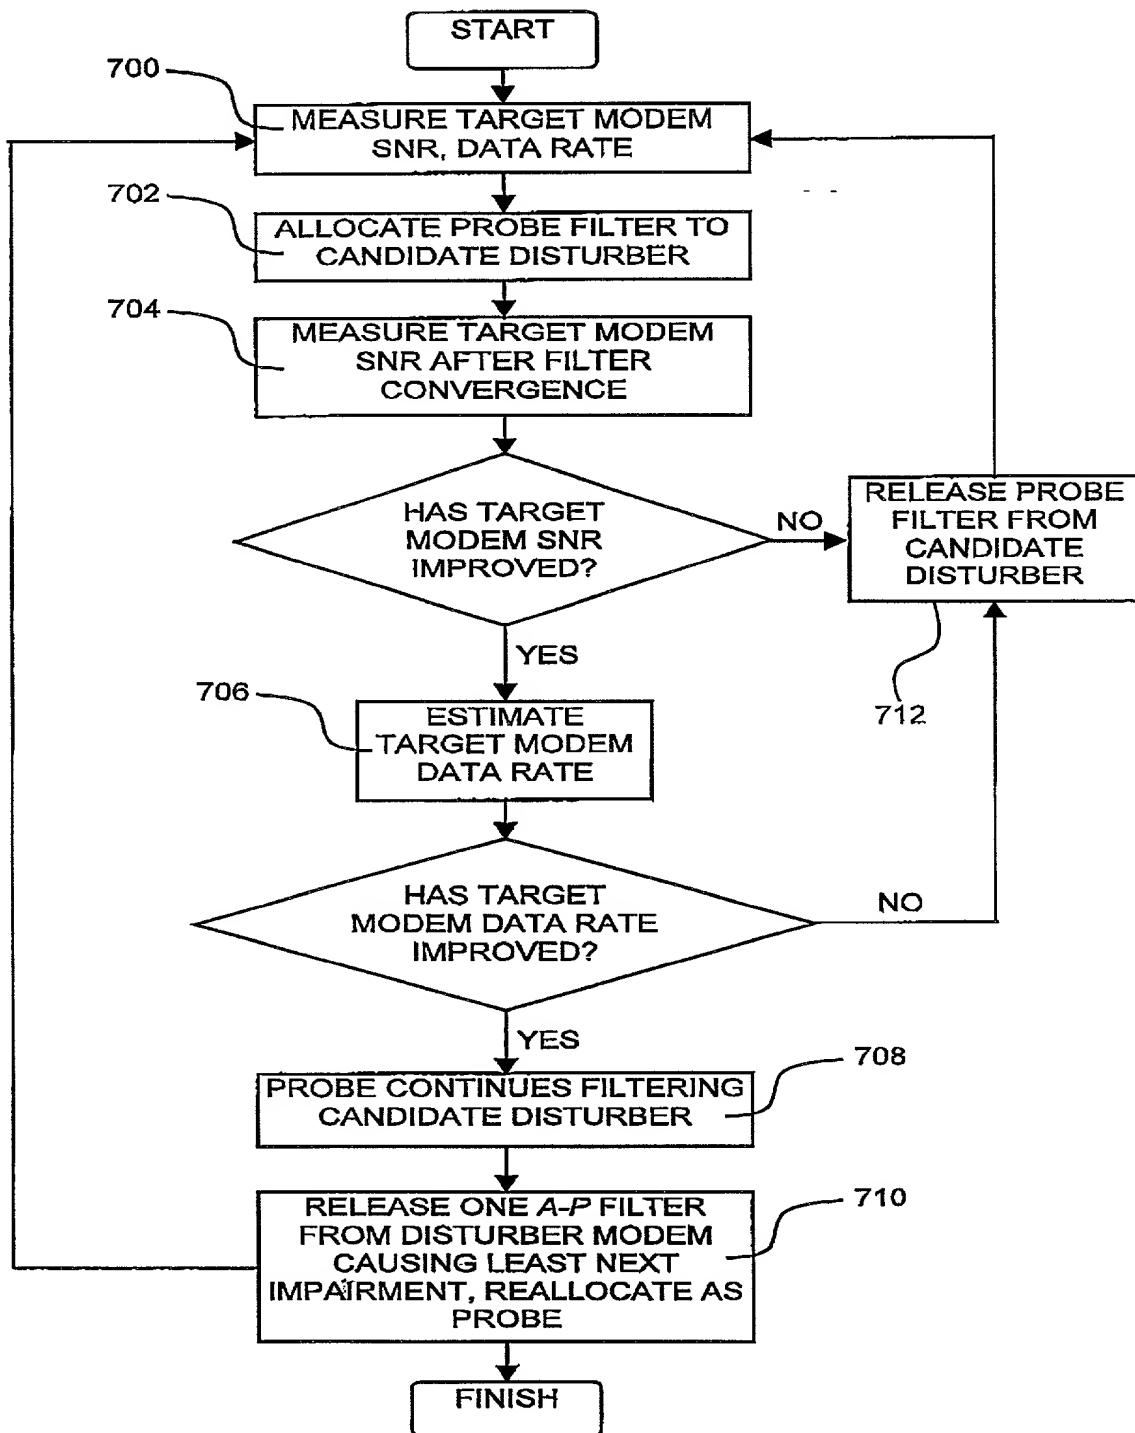


Fig. 7

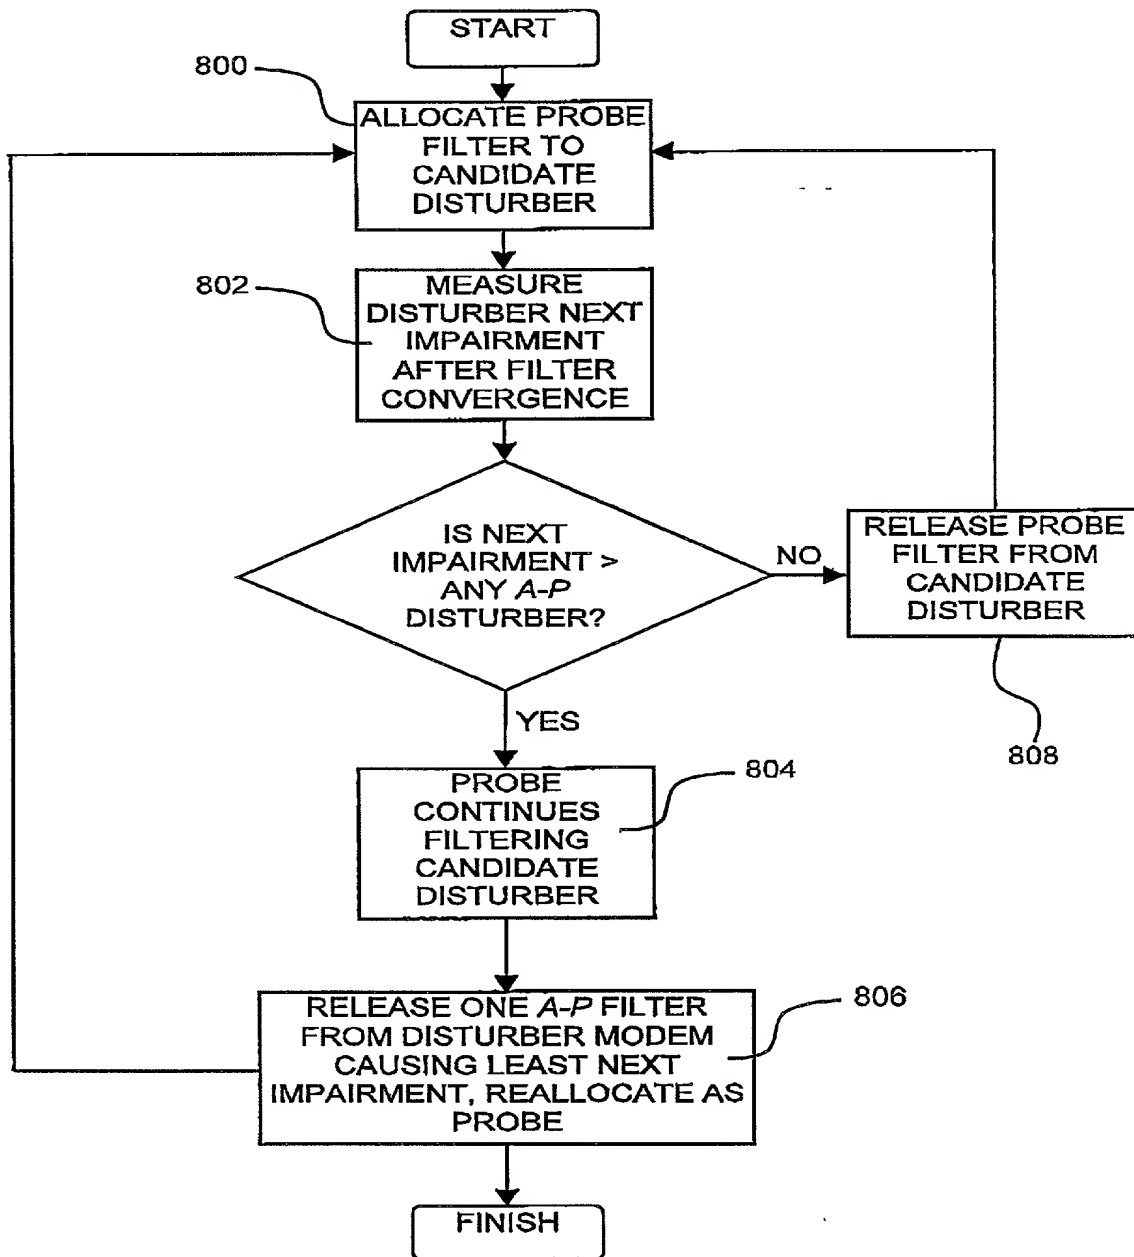


Fig. 8

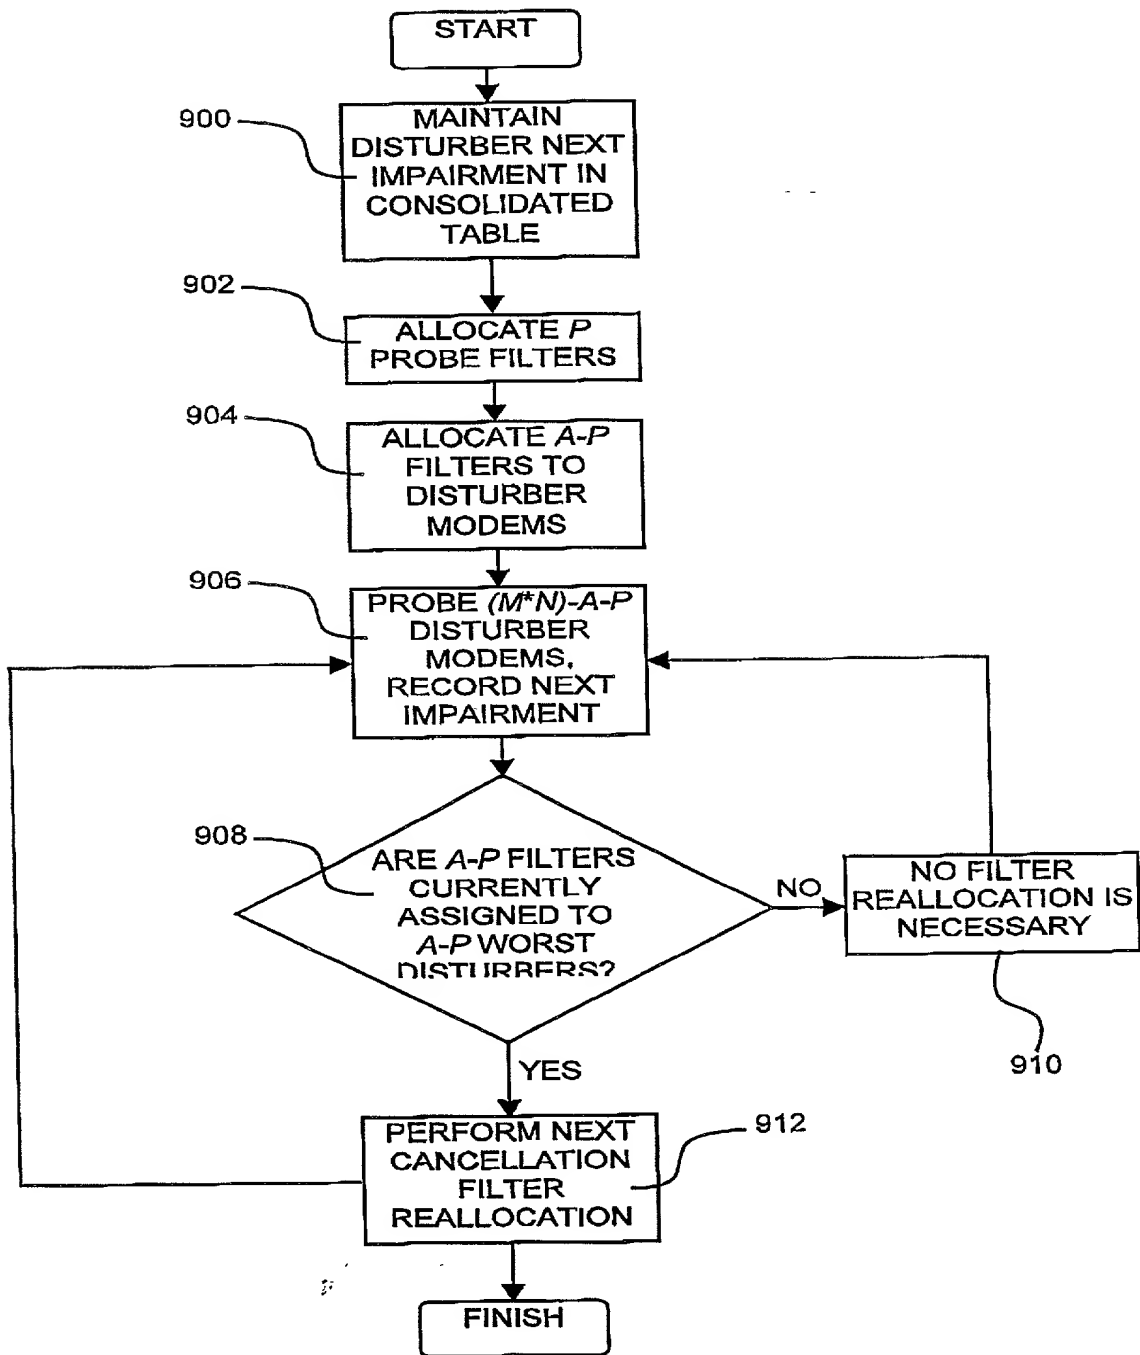


Fig. 9

Attorney Docket No.: P-3750-US

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below under my name.

I believe that I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled

**DYNAMIC ALLOCATION OF NEXT CANCELLATION FILTERS IN A MODEM
POOL ENVIRONMENT**

the Specification of which

☒
☐

is attached hereto

was filed on

as United States Application Number or PCT International
Application No.

and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified Specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any provisional application filed in the United States in accordance with 35 U.S.C. §1.119(e), or any application for patent that has been converted to a Provisional Application within one (1) year of its filing date, or any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

PRIOR FILED APPLICATION(S)

<u>APPLICATION</u> <u>NUMBER</u>	<u>COUNTRY</u>	<u>(DAY/MONTH/YEAR FILED)</u>	<u>PRIORITY</u> <u>CLAIMED</u>
-------------------------------------	----------------	-------------------------------	-----------------------------------

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application listed below, and, insofar as the subject matter of each of the claims of this application is not disclosed in any prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a), which occurred

Attorney Docket No.: P-3750-US

between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION NO.	FILING DATE (DAY/MONTH/YEAR)	STATUS - PATENTED, PENDING, ABANDONED
60/121,228	February 23, 1999	Expired
09/510,550	February 22, 2000	Pending

I hereby appoint as my attorney(s) and agent(s) Heidi M. Brun (Agent, Registration No. 35,104), or Jerome R. Smith, Jr. (Attorney, Registration No. 35,684), or Daniel J. Swirsky (Agent, Registration No. 45, 148) or Mark S. Cohen (Attorney, Registration No. 42, 425) or Rochel L. Abboudi (Agent, Registration No. 44,490) or Suzanne Erez (Agent, Registration No. 46,688) said attorney(s) and agent(s) with full power of substitution and revocation to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Please address all correspondence regarding this application to:

EITAN, PEARL, LATZER, & COHEN-ZEDEK
ONE CRYSTAL PARK, SUITE 210
2011 CRYSTAL DRIVE
ARLINGTON, VA 22202-3709

Direct all telephone calls to (703) 486-0600 and all facsimiles at (703) 486-0800.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF INVENTOR: KANTSCHUK, Amir

FULL RESIDENCE ADDRESS: 7 Haetzel Street, Ramat Gan 52284, Israel

COUNTRY OF CITIZENSHIP: Israel

FULL POST OFFICE ADDRESS: same

SIGNATURE OF INVENTOR _____

DATE _____

Attorney Docket No.: P-3750-US

FULL NAME OF INVENTOR: PELEG, Sharon

FULL RESIDENCE ADDRESS: 7 Sokolov Street, Hod Hasharon 45284, Israel

COUNTRY OF CITIZENSHIP: Israel

FULL POST OFFICE ADDRESS: same

SIGNATURE OF INVENTOR _____

DATE _____

FULL NAME OF INVENTOR: BAR-EL, Maya

FULL RESIDENCE ADDRESS: 20 Zichron-Yaakov Street, Petah Tikva 49728, Israel

COUNTRY OF CITIZENSHIP: Israel

FULL POST OFFICE ADDRESS: same

SIGNATURE OF INVENTOR _____

DATE _____

FULL NAME OF INVENTOR: VAAKNIN, David

FULL RESIDENCE ADDRESS: 61 Nof-Harim Street, Zur Yigal 44862, Israel

COUNTRY OF CITIZENSHIP: Israel

FULL POST OFFICE ADDRESS: same

SIGNATURE OF INVENTOR _____

DATE _____

Attorney Docket No.: P-3750-US

FULL NAME OF INVENTOR: ROZEN, Gilad

FULL RESIDENCE ADDRESS: 35 Hahagana Street, Herzeliya 46325, Israel

COUNTRY OF CITIZENSHIP: Israel

FULL POST OFFICE ADDRESS: same

SIGNATURE OF INVENTOR _____

DATE _____